


# Shutter Actuator – flush-mount

Product ref.: 151347A0

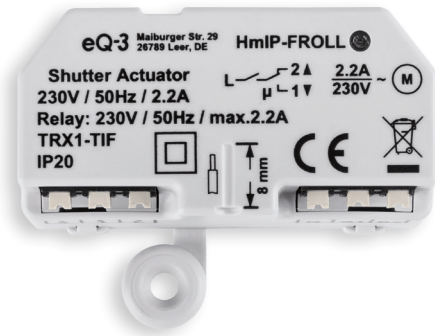

## Technical specifications

Supply voltage	230 V/50 Hz
Current consumption	2.2 A max.
Standby power consumption	0.2 W
Max. switching capacity	500 VA
Load type	motor load
Relay	1x NO contact, 1x changeover contact
Cable type and cross section	rigid and flexible cable, 0.75-1.5 mm <sup>2</sup>
Installation	only in switch boxes (device boxes) in accordance with DIN 49073-1 or surface-mounting boxes in accordance with DIN 60670-1 (e.g. Abox 025 or Abox 040)
Degree of protection	IP20
Ambient temperature	-10 to +55 °C
Dimensions (W x H x D)	54 x 33 x 41 mm
Weight	40 g
Radio frequency band	868.0-868.6 MHz 869.4-869.65 MHz
Typ. open area RF range	180 m

## Product features

- Flush-mounted actuator controls shutters and awnings
- Comfortable operation via Homematic IP app and via Homematic IP Remote Control
- With individually configured week profiles, shutters/awnings can be raised and lowered in a time-controlled manner
- Comfortable control dependent on sunrise and sunset
- Lock-out, storm and heat protection function in combination with the Homematic IP app and other devices
- Suitable for all standard tube motors
- Supports connection of two standard push-buttons via screwless clamps for local operation
- Compact design offers easy installation in flush-mounted boxes or in surface-mounted junction boxes (e.g. ELS Spelsberg Abox 25) e.g. for operation in basements
- A neutral conductor is required for installation
- Comfortable and individual voice control (e.g. via Amazon Alexa or Google Assistant)
- To enable operation, the device has to be connected with one of the following solutions:
  - Homematic IP Access Point with free smartphone app and free cloud service
  - Central Control Unit CCU2/CCU3 with local user interface WebUI
  - Third-party solutions of partners

## Logistical data

Product reference	151347A0
EAN code	4047976513475
Short description	HmIP-FROLL
Packing unit	90
Packing dimensions	122 x 112 x 48 mm
Weight incl. packaging	121.2 g

## Package contents

Homematic IP Shutter Actuator – flush-mount

User manual