


Window/Door Contact with magnet

Product ref.: 151363A0

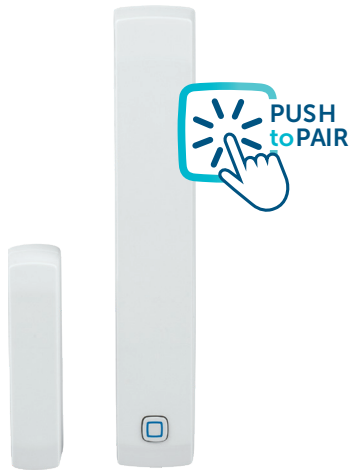

Product features

- Reliably detects opening or closing of windows and doors via a magnetic contact
- **Stand-alone operation (push-to-pair):**
 - Direct pairing of up to eight Homematic IP Radiator Thermostats – basic (HmIP-eTRV-B) for automatic lowering of the room temperature during ventilation
- **In a smart home with the Homematic IP Access Point or Central Control Unit CCU2/CCU3:**
 - Configuration and control via the free Homematic IP smartphone app or the local user interface WebUI
 - Combination of various Homematic IP devices for enhanced functionalities like triggering an alarm via the Homematic IP app if a window is opened during activated alarm mode, for example
 - Displays open windows and doors in the Homematic IP app to monitor them also while being away from home
- Can be flexibly mounted with supplied adhesive strips or screws

Technical specifications

Supply voltage	2x 1.5 V LR03/micro/AAA
Current consumption	35 mA max.
Battery life	4 years (typ.)
Degree of protection	IP20
Ambient temperature	-10 to +50°C
Dimensions Electronic unit (W x H x D)	102 x 18 x 25 mm
Dimensions Magnet contact (W x H x D)	48 x 11 x 13 mm
Weight electronic unit	46 g (including batteries)
Weight magnetic contact	17 g (including magnet)
Radio frequency band	868.0-868.6 MHz 869.4-869.65 MHz
Typ. open area RF range	200 m

Logistical data

Product reference	151363A0
EAN code	4047976513635
Short description	HmIP-SWDM
Packing unit	144
Packing dimensions	122 x 93 x 36 mm
Weight incl. packaging	138.0 g

Package contents

Homematic IP Window / Door Contact with magnet

Magnet contact and spacer

Double-sided adhesive strips (2x) and screws (4x)

1.5 V LR03/micro/AAA batteries (2x)

User manual